


Tumaker Mini Pro

INTERCHANGEABLE EXTRUDER. **PELLET - DIRECT DRIVE HR**

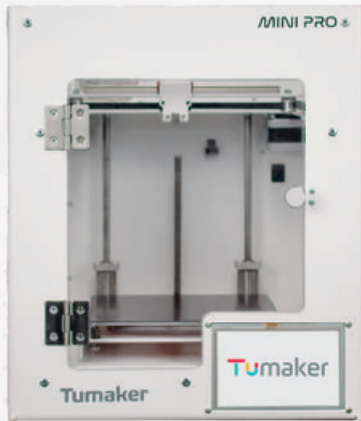

- Direct Extrusion. Spools up to 6 kg.
- Compatible with Automatic Pellet Feeder.
- Fully Enclosed 3D Printer.

	Tumaker Mini Pro (Pellets)	Tumaker Mini Pro (Direct Drive HR)
Extruder	Pellets	Direct Drive HR
Compatible Nozzles	0.4 mm, 0.6 mm, 0.8 mm, 2.0 mm, 4.0 mm, 5.0 mm 0.8 mm	0.15 mm, 0.25 mm, 0.4 mm 0.6 mm , 0.8 mm 0.6 mm
Included Nozzle		
Materials	Recommended pellet size: Circular 3 - 5 mm	ABS, ASA, NYLON, PET-G, PLA, PP, TPU Hardness, TPU...
Print Volume	145 x 115 x 150 mm	
Printer Weight	10 kg	
Printer Dimensions	350 x 350 x 380 mm	
Package Weight	12 kg	
Heated Bed Temperature	Up to 100 °C	
Head Temperature	Up to 300 °C	
Calibration	Automatic	
Structure	Closed with filters	
Connectivity	Wi-Fi, Ethernet, Micro SD	
Noise Emission	44 dB (40 dB with door closed)	
Display	5" colour touch screen	
Compatible Software	MacOS, Windows, Linux	
Power	120W, 500W, 950W	
Compatible Slicing Software	Simplify 3D, CURA, SuperSlicer	
File Format	STL, OBJ, Gcode	
Warranty	1 year	