

Tumaker MODULAR PRINTERS

DATASHEET



One extruder



Independent double extruder



Independent double extruder

Mini Modular


Printing volumen	200 x 200 x 200 mm
Printer weight	17 kg
Printer size	414 x 481 x 500 mm
Package weight	48 kg
Package weight	729 x 533 x 709 mm
Max. power	1000 W

NX Modular

300 x 300 x 250 mm
60kg
840 x 635 x 805 mm
114kg
953 x 800 x 957 mm
1000 W

BigFoot Modular

500 x 500 x 500 mm
92kg
1040 x 835 x 1044 mm
160kg
1153 x 1000 x 1197 mm
1750 W



Heated bed 100 °C
Extruder temperature 300 °C
Heated chamber (only on Mini Modular)

Closed structure with filters

Noise level: 44 dB
Closed door: 40 dB



Connectivity
Ethernet
Wi-Fi

Display: 5" - 7" Colour touch screen

Control browser:
MacOS, Windows, Linux
Chrome, Edge, Safari, etc.



Simplify3D Software
Files: STL, OBJ, AMF
Compatible with other Slicers


+Info

Intelligent Energy Management
Automatic build plate leveling
MicroSD storage
1 Year warranty



Tumaker

INTERCHANGEABLE EXTRUDERS

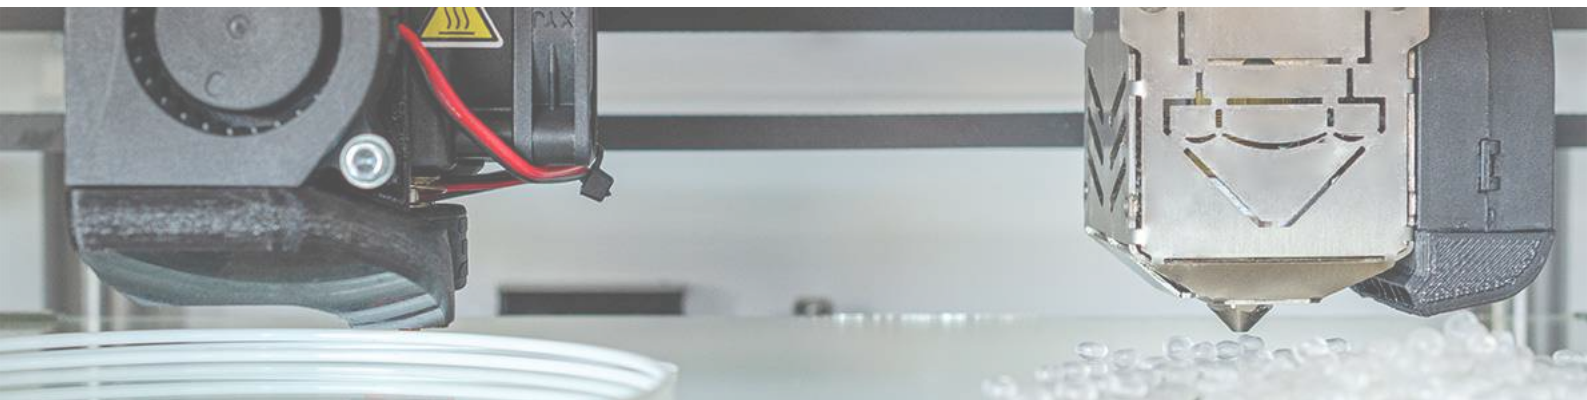

Filament

1.75 mm

Nozzles**:

- 0.15 mm
- 0.25 mm
- 0.4 mm
- 0.6 mm
- 0.8 mm

Included with the extruder

Pellet

Nozzles**:

- 0.4 mm
- 0.6 mm
- 0.8 mm
- 2.0 mm
- 4.0 mm
- 5.0 mm

Included with the extruder

Optimised materials:


- ABS
- ASA
- NYLON
- PET-G
- PLA
- PP
- TPU Hardness
- TPU



Pellet recommended size:

- Circular of 3 mm - 5 mm**

Up to 6kg spools
Direct drive extruder



Possibility to recycle materials
Automatic pellet feeder **

Consult new products **